


SURGE ARRESTERS

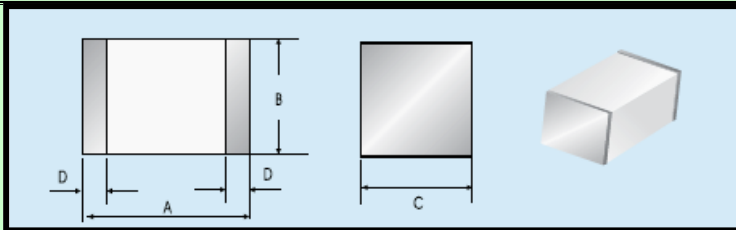


**THE SMALLEST
SMD**

型号代号	BS系列	BA/BC系列	BT/BW系列
A	3.2 ± 0.2	4.5 ± 0.2	5.7 ± 0.2
B	1.6 ± 0.2	3.2 ± 0.2	5.0 ± 0.2
C	1.6 ± 0.2	2.7 ± 0.2	5.0 ± 0.2
D	0.3 ± 0.2	0.5 ± 0.2	0.5 ± 0.2

IMPULSE DISCHARGE CURRENT 8/20 μ S	DC BREAKDOWN VOLTAGE
0,5 KA	FROM 70 TO 600 V
1 KA	FROM 70 TO 600 V
2 KA	FROM 70 TO 600 V
3 KA	FROM 70 TO 600 V
5 KA	FROM 70 TO 600 V


- TOLERANCES 20 % AND 30 % AVAILABLE
- CAPACITANCE \leq 1 pF

SURGE ARRESTERS

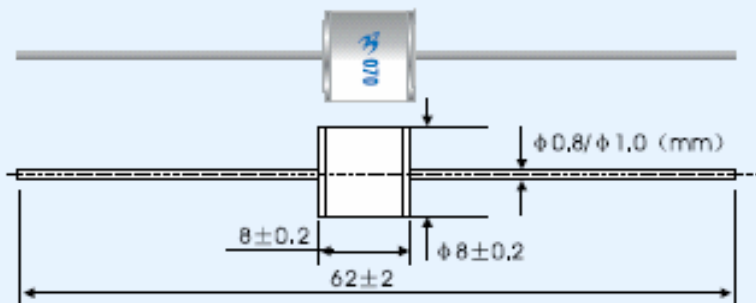

**HIGH
VOLTAGE**

DC BREAKDOWN VOLTAGE	1500 V	2500 V	DA 800 A 5500 V
TOLERANCE	25%	25%	20%
IMPULSE SPARKOVER VOLTAGE 1KV/ μ S	< 2000 V	< 4500 V	DA < 1200 A < 7000
IMPULSE DISCHARGE CURRENT 8/20 μ S	5 KA	5 KA	2,5 KA

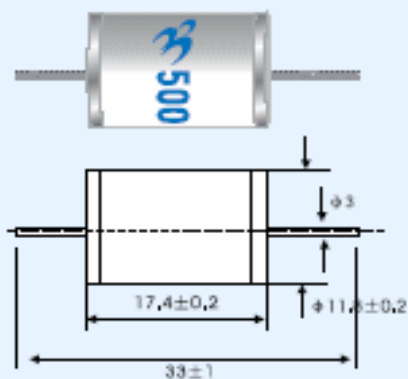

65 KAMP

DC BREAKDOWN VOLTAGE	500 V	800 V
TOLERANCE	20%	20%
IMPULSE SPARKOVER VOLTAGE 1KV/ μ S	< 800 V	< 1000 V
IMPULSE DISCHARGE CURRENT 8/20 μ S	65 KA	65 KA