



2N

SMD NANO FUSE (FAST-ACTING)

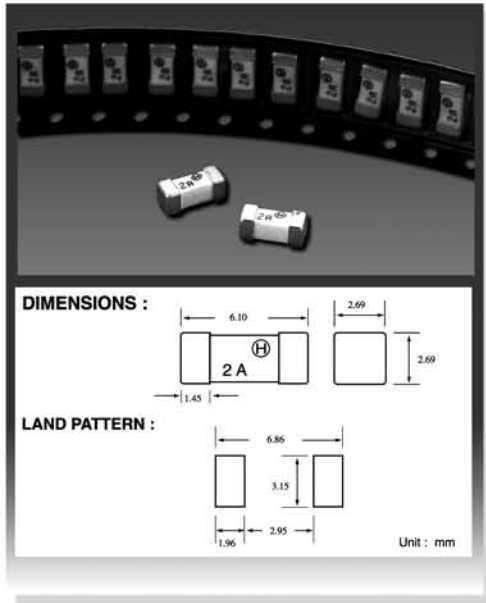

2N RoHS I-T CHARACTERISTICS CURVE
2N RoHS

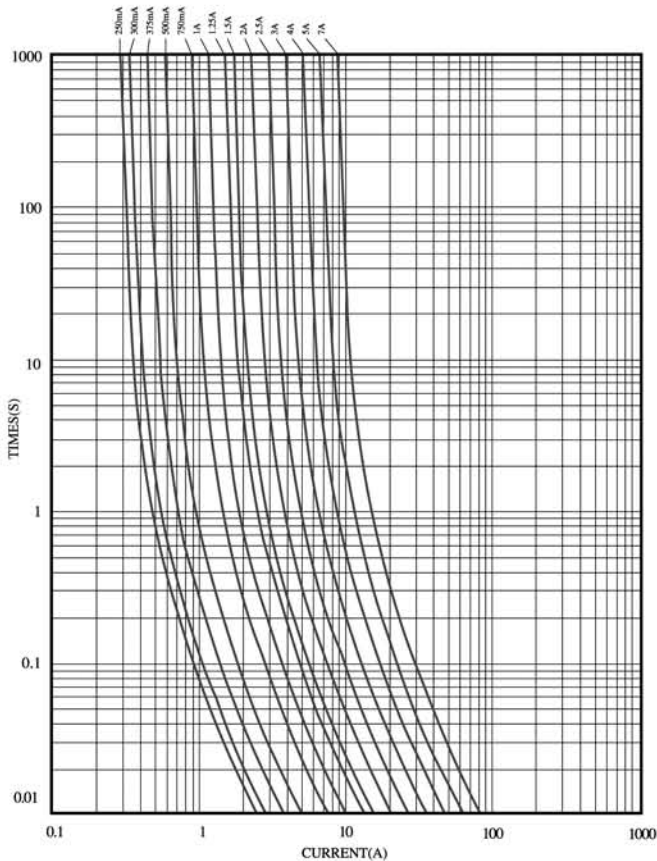

CATALOG NO.	AMPERE RATING	VOLTAGE RATING	INTERRUPTING RATING	APPROVALS			
				CCC	UR	CSA	PSE
2N-0063L	63mA	125V	50A				
2N-0080L	80mA	125V	50A				
2N-0100L	100mA	125V	50A		○	○	
2N-0125L	125mA	125V	50A		○	○	
2N-0160L	160mA	125V	50A		○	○	
2N-0200L	200mA	125V	50A		○	○	
2N-0250L	250mA	125V	50A		○	○	
2N-0315L	315mA	125V	50A		○	○	
2N-0375L	375mA	125V	50A		○	○	
2N-0400L	400mA	125V	50A	○	○	○	
2N-0500L	500mA	125V	50A	○	○	○	
2N-0630L	630mA	125V	50A	○	○	○	
2N-0750L	750mA	125V	50A	○	○	○	
2N-0800L	800mA	125V	50A	○	○	○	
2N-010L	1A	125V	50A	○	○	○	○
2N-013L	1.25A	125V	50A	○	○	○	○
2N-015L	1.5A	125V	50A	○	○	○	○
2N-016L	1.6A	125V	50A	○	○	○	○
2N-020L	2A	125V	50A	○	○	○	○
2N-025L	2.5A	125V	50A	○	○	○	○
2N-030L	3A	125V	50A	○	○	○	○
2N-032L	3.15A	125V	50A	○	○	○	○
2N-035L	3.5A	125V	50A	○	○	○	○
2N-040L	4A	125V	50A	○	○	○	○
2N-050L	5A	125V	50A	○	○	○	○
2N-063L	6.3A	125V	50A	○	○	○	○
2N-070L	7A	125V	50A		○	○	○
2N-080L	8A	125V	50A		○	○	○
2N-100L	10A	125V	50A		○	○	○
2N-120L	12A	65V	50A		○	○	○
2N-150L	15A	65V	50A		○	○	○


○ DENOTES FOR PENDING

ELECTRICAL CHARACTERISTICS:

RATING	BLOWING TIME	
	100%	4 hours Min
200%	60sec Max	(63mA-10A)
	5sec Max	(12A-15A)

PACKAGING:

INNER BOX

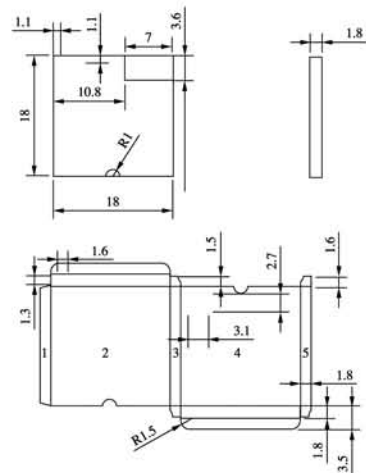



*Do you need more
information ?*

DROP US A CALL !



Tel. +39 02 24304651

Fax +39 02 24304654

E-mail sales@asiatronix.com

*Design or construction of
any products and technical information
are subject to change
without notice.*

www.asiatronix.com