


New Product

Pb Free Thermal Cutoffs ELCUT S Series



The photo of SJ is shown.

FEATURES

- The environment-friendly products do not contain cadmium and lead.

IMPORTANT NOTICE

Read Standard Specification and Instruction Manual for use thoroughly.

TERMS

•Rated Functioning Temperature

(T_f)
The acceptable tolerance is +0, -10°C except PSE. The one for PSE is 7°C

•Holding Temperature

(C-UL & CSA: T_h, CCC: T_c)
The maximum temperature at which the thermal cutoffs are energized with rated current, does not open for 168 hours.

•Maximum Temperature Limit

(T_m)
The maximum temperature at which an opened thermal cutoff does not reclose for 10 minutes.

■Ratings


Type No.	Rated Functioning Temperature T _f (°C)	Cut-off Temperature (°C)	T _h T _c (°C)	Max. Use Tem. (°C)	T _m (°C)	Electrical Rating		UL	C-UL (CSA) *1	VDE	CCC	PSE
						Ampere (A)	Voltage (V)					
SE	108	104±3	92	85	200	1	AC250	●	●	●	●	●
			89	82		1.5	AC125	●	●	●	—	—
S2	115	112±3	89	89	200	1	AC250	●	●*1	●	●	●
						1.5	AC125	●	●*1	●	●	—
SX	133	129±3	116	108	200	1	AC250	●	●	●	●	●
			115	107		1.5	AC125	●	●	●	—	—
SJ	145	141±3	123	120	200	0.8	AC250	●	●	●	●	●

UL,C-UL:E50082, CSA: LR57404, VDE:923000-1171-0010 *1: Certified by CSA

Cut-off temperature is measured with silicone oil bath of which temperature is increased at the rate of 1°C/min. Detecting current is 0.1A or less.

T_h and T_c are for C-UL(CSA) and CCC respectively.

■Dimensions

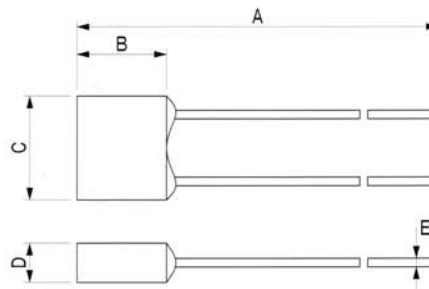

Dimensions (mm)					
Lead length	A	B	C	D	E
Regular	55±3	4.0±0.5	5.2±0.5	2.2±0.3	0.53±0.02
Long	70±3				



*Do you need more
information ?*

DROP US A CALL !



Tel. +39 02 24304651

Fax +39 02 24304654

E-mail sales@asiatronix.com

*Design or construction of
any products and technical information
are subject to change
without notice.*

www.asiatronix.com