


Φ 10 General

Series	Part No.	Varistor Voltage	Max. Allowable Voltage		Max. Clamping Voltage (8/20 μs)		Rated Wattage (W)	Energy		Max. Peak Current (8/20 μs)		Capacitance 1kHz (pF)
			ACr.m.s(V)	DC(V)	V <sub>c</sub> (V)	I <sub>p</sub> (A)		10/1000 μs (J)	2ms (J)	1 time (A)	2 times (A)	
MYG2	10K11	18(16 - 20)	11	14	36	5	0.05	2.1	1.5	500	250	7500
	10K14	22(19 - 25)	14	18	43			2.8	2.0			6000
	10K17	27(24 - 30)	17	22	53			3.5	2.5			4000
	10K20	33(29 - 37)	20	26	65			4.2	3.0			3000
	10K25 + Δ	39(35 - 43)	25	31	77			4.9	3.5			2600
	10K30 + Δ	47(42 - 52)	30	38	93			6.3	4.5			2200
	10K35 + Δ	56(50 - 62)	35	45	110			7.7	5.5			1800
MYG3	10K40 + Δ	68(61 - 75)	40	56	135	25	0.4	9.1	6.5	2500	1250	1300
	10K50 + Δ	82(73 - 91)	50	65	135			11.2	8.0			1800
	10K60 + Δ	100(90 - 110)	60	85	165			14.0	10.0			1400
	10K75 + Δ	120(108 - 132)	75	100	200			16.8	12.0			1100
	10K95 + Δ	150(135 - 165)	95	125	250			22.4	16.0			560
	10K115 + Δ	180(162 - 198)	115	150	305			25.8	18.4			560
	10K130 + Δ	200(180 - 220)	130	170	340			28.0	20.0			500
	10K140 + Δ	220(198 - 242)	140	180	360			32.2	23.0			450
	10K150 + Δ	240(216 - 264)	150	200	395			35.0	25.0			400
	10K175 + Δ	270(243 - 297)	175	225	455			39.0	28.0			350
	10K190 + Δ	300(270 - 330)	190	250	505			43.0	31.0			330
	10K210 + Δ	330(297 - 363)	210	276	545			48.0	34.0			325
	10K230 + Δ	360(324 - 396)	230	300	595			52.0	37.0			300
	10K250 + Δ	390(351 - 429)	250	320	650			56.0	40.0			270
	10K275 + Δ	430(387 - 473)	275	350	710			63.0	45.0			250
	10K300 + Δ	470(423 - 517)	300	385	775			63.0	45.0			230
	10K325 + Δ	510(459 - 561)	325	425	840			63.0	45.0			230
	10K340 + Δ	530(477 - 583)	340	445	870			63.0	45.0			220
	10K360 + Δ	560(504 - 616)	360	470	925			63.0	45.0			200
	10K385 + Δ	620(558 - 682)	385	505	1025			63.0	45.0			130
	10K420 + Δ	680(612 - 748)	420	560	1120			63.0	45.0			120
	10K460 + Δ	750(675 - 825)	460	615	1240			70.0	50.0			110
	10K480 + Δ	780(702 - 858)	480	650	1290			70.0	50.0			110
	10K510 + Δ	820(738 - 902)	510	670	1355			77.0	55.0			100
	10K550 + Δ	910(819 - 1001)	550	745	1500			84.0	60.0			90
	10K625 + Δ	1000(900 - 1100)	625	825	1650			91.0	65.0			90
	10K680 + Δ	1100(990 - 1210)	680	895	1815			98.0	70.0			80

- + = UL 1449 File E139158(S)-Transient Voltage Surge Suppression
- = UL 1449 File E181155 (N)-Across-The-Line Application
- Δ = C-UL for CSA C22.2 File E139158 (S)

Dimension in mm

Series	Part No.	Dmax	H	A	Wmax
MYG2	10k11	14.0	18.0	7.5 ± 1	3.5
	10k14				4.0
	10k17				4.0
	10k20				4.5
	10k25				5.0
	10k30				5.0
	10k35				5.3
MYG3	10k40	14.0	18.0	7.5 ± 1	5.0
	10k50				5.1
	10k60				5.1
	10k75				5.5
	10k95				6.0
	10k115				6.0
	10k130				5.0
	10k140				5.0
	10k150				5.2
	10k175				5.2
	10k190				5.2
	10k210				5.5
	10k230				5.5
	10k250				6.0
	10k275				6.5
	10k300				6.5
	10k325				6.5
	10k340				6.7
	10k360				7.0
	10k385				7.0
	10k420				7.5
	10k460				7.5
	10k480				8.0
	10k510				8.0
	10k550				8.0
	10k625				8.5
	10k680				9.0

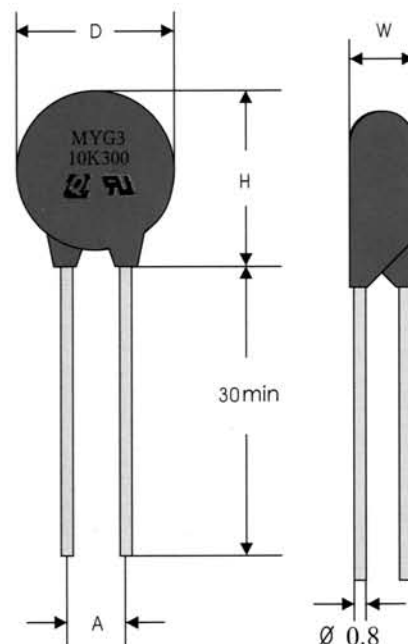



*Do you need more  
information ?*

**DROP US A CALL !**



**Tel. +39 02 24304651**

**Fax +39 02 24304654**

**E-mail [sales@asiatronix.com](mailto:sales@asiatronix.com)**

*Design or construction of  
any products and technical information  
are subject to change  
without notice.*

**[www.asiatronix.com](http://www.asiatronix.com)**